





## Measured quantities

- Relative pressure + temperature
- Absolute pressure + temperature
- Differential pressure + temperature

## Applications

- Leak test of gas supply according to G469 B3 and C3
- Leak test of water supply according to W400-2
- Leak test for process industry



# ESS3 R2



Data logger with one radial sensor and additional temperature sensor

**ESS3 R2 overview**

The devices of the ESS3 R2 series are used for leak testing in pipeline construction. Besides the pressure measurement, recording of the pipeline temperature by a temperature sensor is also possible. The device determines the temperature-compensated test pressure independently and thus compensates for pressure fluctuations that occur because of the effect of temperature on the pipeline. These test results are therefore much more meaningful than pressure measurements alone.

**Battery-operated devices** have a modular design and can be subsequently furnished with a different measuring range by the user. Particular importance was attached to a robust design suitable for use at construction sites (protection classes up to IP 68 - watertight).

**The operator control unit** stores the measured values supplied by the pressure and temperature sensors in non-volatile memory for a large number of leak tests. The current measured values and changes since the start of the test are indicated on a display. After completion of the test, the measurement data is transferred to the USB connection of the PC by means of a non-contact optical IrDA interface.

**A lithium battery unit** enables multiple years of operation under ordinary conditions.

**The TfsWin III software** is used to graphically display and store the tests. The report is then created here.

**Sensor**

The accuracy and resolution of the sensor determines the informative value of the test. Particular importance was attached to high stability of the measured pressure values under fluctuating ambient temperature conditions.

- Stainless steel-enclosed piezoresistive sensor with high long-term stability, suitable for liquid and gaseous media, resistant to corrosive media
- High resolution of measured values (typically 1 mbar for 25 bar measuring range); multiple measuring ranges are possible for one sensor.
- Effect of ambient temperature on the measured pressure values was eliminated by a fully automatic temperature compensation of the pressure measuring cell.
- High measuring rates through high self-resonant frequency
- High overpressure protection and high burst pressure
- Special designs, e.g., for O<sub>2</sub> measurement
- Appropriately-graduated fixed or customizable measuring ranges and various accuracy classes up to +- 0.05 % of full scale
- Temperature sensors are available as rod-type sensors or are suitable for use in thermowells

**Scope of functions**

<b>Application</b>	used for mobile leak testing on gas lines (DVGW G469)
<b>Display</b>	Actual value Maximum and minimum value and differential value, memory utilisation and battery status
<b>Settings</b>	Measurement location number and name Time and date of measurement Maximum permissible pressure loss Minimum test pressure
<b>Measuring rate</b>	125 msec ... 6 hours
<b>Measu. precision</b>	up to 0.05 % of full scale
<b>Resolution</b>	up to 0.004 % of full scale ( < 1 mbar for measuring range 25 bar)
<b>Operation</b>	Via menu (via keyboard) Via TfsWin III software (via IrDA interface cable)
<b>Storage</b>	250,000 date-time values / 512 kB Typical range: approx. 50 pressure tests (thanks to data compression)
<b>Software</b>	TfsWin III for parameterisation, display, archiving of the data preparation of test reports on screen

Table 1: ESS3 R2 (scope of functions)

**Pressure sensor**

Media compatibility: All liquids and gases that are compatible with stainless steel 1.4301 and NBR seal material.

Process connection: G1/2 external thread, G1/8 internal thread

Measuring range	Precision [% of FS <sup>1</sup> ]			
	Standard ± 0,4 %	Premium ± 0,09 %	Select ± 0,05 %	Select plus ± 0,05 % < 5 mbar <sup>2</sup>
0 ... 100 mbar relative	X	X	~	~
0 ... 100 mbar differential pressure	X	~	~	~
0 ... 250 mbar relative	X	X	~	~
0 ... 1 bar relative	X	X	X	~
0 ... 1 bar differential pressure	X	~	~	~
0 ... 2.5 bar relative	X	X	X	~
0 ... 2.5 bar absolute	X	X	X	~
0 ... 10 bar relative	X	X	X	~
0 ... 10 bar absolute	X	X	X	~
0 ... 10 bar differential pressure	X	~	~	~
0 ... 25 bar absolute	X	X	X	X
0 ... 100 bar absolute	X	X	X	~
100 mbar ... 14 bar relative <sup>3)</sup>	X	X	X <sup>4)</sup>	~
2.5 bar ... 200 bar absolute <sup>3)</sup>	X	X	X <sup>4)</sup>	~
100 mbar ... 35 bar differential pressure <sup>3)</sup>	X	~	~	~
0 ... 200 bar - 0 ... 700 bar absolutet <sup>3)</sup>	X	~	~	~
Negative pressure	X	~	~	~

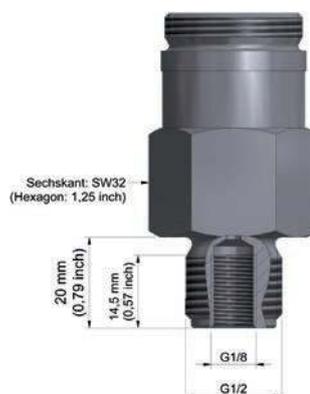


Figure 1: Pressure sensor

1) FS: of full scale  
 2) Difference < 5mbar at an ambient temperature change of 15 K, according to DVGW G469:2010 test method C3  
 3) customized measuring range; freely selectable within this range  
 4) on request

Table 2: Pressure sensors ESS3 R2

**Temperature sensor**

Rod-type sensor with 5 m cable and connecting plug.

Media compatibility: All liquids and gases that are compatible with stainless steel 1.4301.

Rod-type sensor: 150 mm x 4.5 mm

Temperature sensor measuring range and type	Screw-in sensor	Cable sensor	
-10 °C ... +40 °C	Rod sensor	~	X
-10 °C ... +40 °C	Immersion sleeve 90 mm	X	X
-10 °C ... +40 °C	Immersion sleeve 140 mm	X	X
-30 °C ... +150 °C <sup>1)</sup>	Rod sensor	~	X
-30 °C ... +150 °C <sup>1)</sup>	Immersion sleeve 90 mm	X	X
-30 °C ... +150 °C <sup>1)</sup>	Immersion sleeve 140 mm	X	X
Measuring precision		+/- 0,3 °C	

1) freely selectable within this range

Table 3: Temperature sensor ESS3 R2

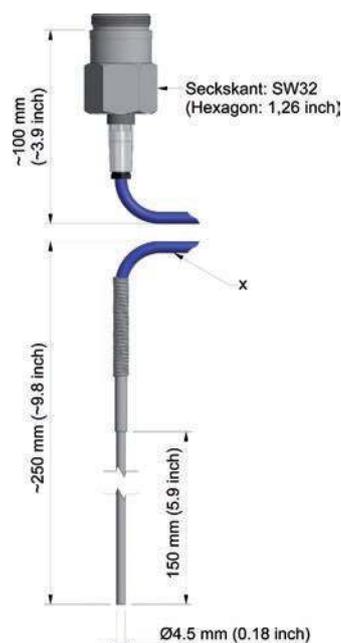


Figure 3: Temperature sensor, rod-type



## About UNION Instruments

UNION Instruments GmbH, founded in 1919, is a specialized supplier of measuring instruments in the areas of calorimetry and gas composition. Its user and customer base includes biogas producers, the chemical industry, and energy and water suppliers. The company has its headquarters in Karlsruhe and a subsidiary in Lübeck. With 30 international distributors, UNION Instruments operates worldwide. The company's core businesses include development and production as well as maintenance, service, and support.

## Our service performance



### Support

The **UNION-hotline** helps to solve all inquiries and urgent issues fast and easy. Device specific concerns can be solved worldwide within minutes by direct communication via TEAMVIEWER.



### Original spare parts

Original spare parts for the majority of UNION's products are on stock directly at site and ready for dispatch within a few hours.



### Software

For read-out of measurement and calibration data a device-specific software is available for our clients. In addition to the graphic display of measurement data its export in several database formats is possible.



### Training

UNION offers individual in-house training or on-site seminars for installation, use and maintenance of our devices even at the customer's premises. Training is individually adapted to the client's requirements.



### Repair service

A global service for inspection, maintenance and repair of our devices and systems is provided directly by UNION and via its distributors.



### Certification

Since 20 years we have implemented the ISO9001 system. UNION's products are certified to ATEX and UL/CSA directives accordingly. Industrial safety "**Safety with System**" is part of UNION's company policy.



### Engineering

In the last decades UNION compiled a very high level to the state of the art that covers many market segments. So a wide range of possible solution approaches is on-hand.



### Calibration

As part of maintenance and service UNION provides the validation and re-calibration of measuring devices in conformity with certified custody transfer instruments and / or traceable perpendicular.

[www.union-instruments.com](http://www.union-instruments.com)

UNION Instruments GmbH ■ Zeppelinstraße 42, 76185 Karlsruhe, Germany  
Phone: +49 (0) 721-68 03 81 0 ■ Fax: +49 (0) 721-68 03 81 33  
E-Mail: [info@union-instruments.com](mailto:info@union-instruments.com)